
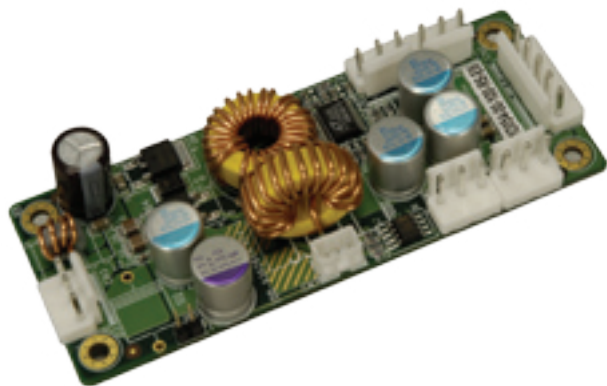


IDD-936260A 60 W DC/DC Converter Module

1
Application
Server
Platform2
Single
Board
Computer3
IBX Series
POS PC4
AFOLUX
POS
Panel PC5
Video
Capture
Card6
KAMIO
RISC7
IOVU
Open HMI8
VITO
Universal
Controller9
DINO
BLADE10
LCD
Product
Series11
Embedded
System12
Industrial
Computer
Chassis13
Power
Supply14
Peripherals

Specifications

- Output (max.): 12 V@3 A, 5 V@10 A & 5 VSB@0.5 A
Max. total output: 60 W
- Input: 9 VDC to 36 VDC
- Performance characteristics
Noise & ripple: <240 mV
Line regulation: <50 mV
Load regulation: <100 mV
Efficiency: Up to 90%
- Dimensions: 40 mm x 100 mm
- Weight: NW: 58 g
- Operating temperature: -20°C ~ 70°C



PIN Assignments

Input Power Connector

CN3	Pin 1	Pin 2	Pin 3	Pin 4
	VIN	VIN	GND	GND

Output Power Connector

CN4	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5
	+5 V	+5 V	GND	GND	+12 V

CN1 CN2 CN5 CN6	Pin 1	Pin 2	Pin 3
	+5 V	GND	+12 V

ATX Mode Connector

CN7	Pin 1	Pin 2	Pin 3
	5 VSB	GND	PS_ON

Wire Harness Selection Guide

DC Input (CN3)

Options 1.

PN: **CB-P1LP4-RS**

Cable for FSP0601AD101C 60 W/
UP0451E12P 45 W/UP0251E12PL
25 W AC-DC adapter

Options 2.

PN: **CB-MD4P4-RS**

Cable for 63000-FSP120AAB-RS
120 W AC-DC adapter

Options 3.

PN: **CB-NOLP4-RS**

Cable for terminal block

I/O Power (CN1, CN2, CN5 & CN6)

Options 1.

PN: **CB-3PSATA-RS**

Cable for SATA

Options 2.

PN: **CB-3PIDE-RS**

Cable for IDE HDD or any STD 4
pins I/O devices

SBC Main Power (CN4)

Options 1.

PN: **CB-5PSBC-RS**

5-pin connector to DC/DC
power modules CN4

12 V only connector for
NANO series SBC

Cable for SATA HDD

Power On/Off (CN7)

Options 1.

PN: **CB-JST3PSW-RS**

Cable with on/off switch

Options 2.


PN: **CB-JST3P001-RS**

Cable to SBC (5 VSB & PS_ON)

Features

1. Wide input range: 9-36 VDC
2. AT or ATX mode on/off
3. Up to 90% efficiency
4. RoHS compliant
5. Compact size

Dimensions (Millimeters)

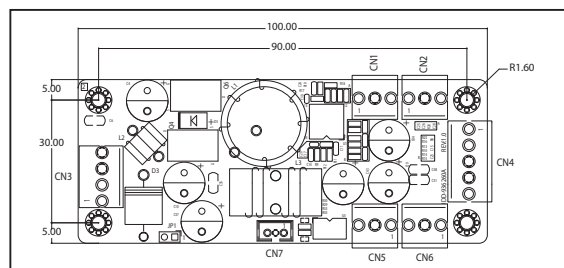

Packing information

1 x IDD-936260A

1 x QIG

Ordering Information

Part No.	Description
IDD-936260A-R10	60 W DC/DC 9~36 V input; 12 V, 5 V & 5 VSB output
CB-5PSBC-RS	20 cm cable to SBC power input
CB-JST3PSW-RS	30 cm cable on/off switch
CB-JST3P001-RS	30 cm 5 VSB, PS_ON wire to SBC
CB-3PSATA-RS	10 cm cable for SATA power
CB-3PIDE-RS	10 cm cable for IDE HDD power
CB-P1LP4-RS	20 cm cable for FSP0601AD101C 60 W/ UP0451E12P 45 W/UP0251E12PL 25 W AC-DC adapter
CB-MD4P4-RS	20 cm cable for 63000-FSP120AAB-RS 120 W AC-DC adapter
CB-NOLP4-RS	20 cm cable for terminal block DC input