
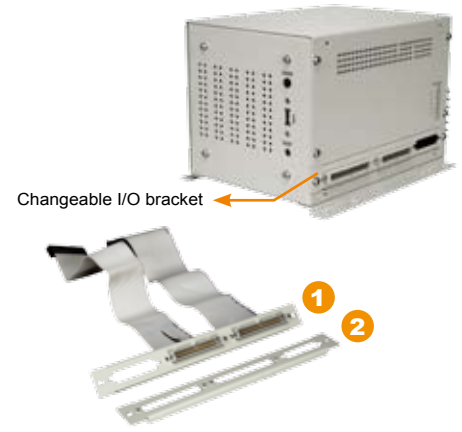
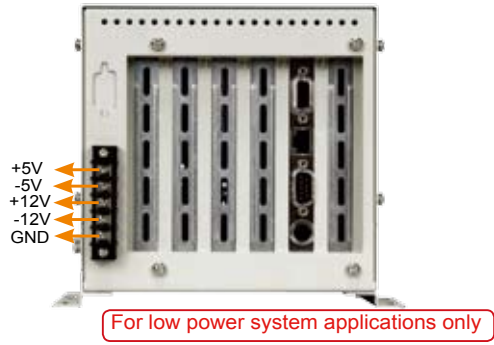


PAC-52G

6-slot Half-size Compact Chassis

- 1 Application Server Platform
- 2 Single Board Computer
- 3 IBX Series POS PC
- 4 AFOLLUX POS Panel PC
- 5 Video Capture Card
- 6 KAMIO RISC
- 7 IOVU Open HMI
- 8 VITO Universal Controller
- 9 DINO BLADE
- 10 LCD Product Series
- 11 Embedded System
- 12 Industrial Computer Chassis
- 13 Power Supply
- 14 Peripherals

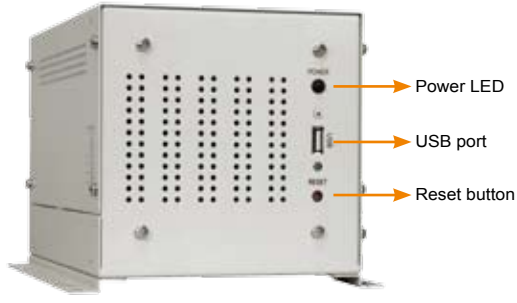

1. I/O bracket with 40-pin and 34-pin ribbon cables
2. I/O cable without cables

Features

- ◆ RoHS compliant design
- ◆ One USB port on the front panel
- ◆ 5-pin terminal block for 5 VDC / 12 VDC input


Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot CPU cards
◆ I/O ports	1 x USB
◆ I/O openings	1 x COM
◆ Expansion Slots	6 slots
◆ Indicators	Power
◆ Button	reset
◆ Operating Temperature	0°C~50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	2 kg / 3.4 kg
◆ Dimensions (DxWxH)	218 mm x 152.2 mm x 147 mm

Ordering Information

Part No.	Description
PAC-52GW/BP-6S	6-slot half-size chassis, white, with BP-6S-RS-R40, RoHS
PAC-52GW/IP-6S	6-slot half-size chassis, white, with IP-6S-RS-R40, RoHS
PAC-52GW/IP-5S2	6-slot half-size chassis, white, with IP-5S2-RS-R40, RoHS

Dimensions

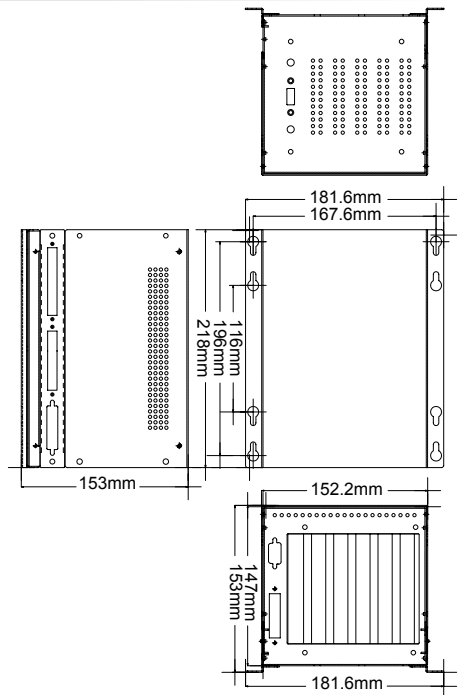

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-6S-RS-R40	ISA	0	6	0	0	0	AT
IP-6S-RS-R40	PCISA	3	2	0	0	0	AT
IP-5S2-RS-R40	PCISA	4	0	0	0	0	AT