



RACK-3200G

4U 20-slot Full-size Rackmount Chassis

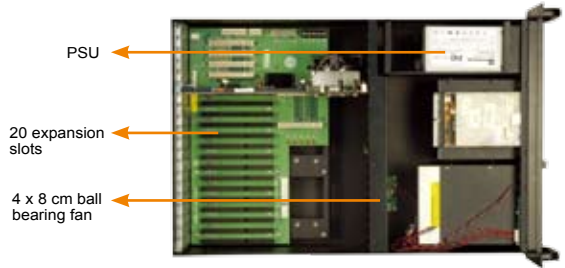

CD-ROM, FDD and HDD are not included in package

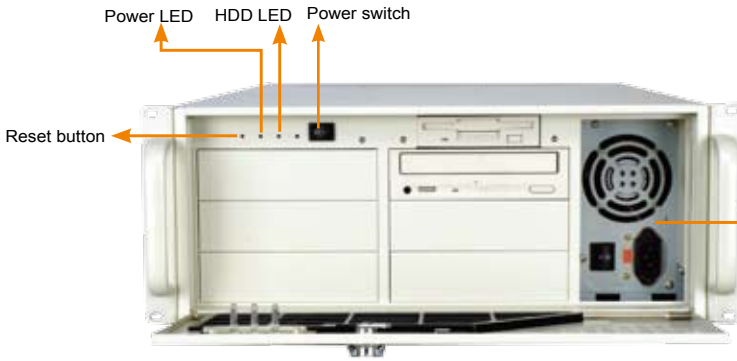

Features

- ◆ RoHS compliant design
- ◆ Four, 8 cm cooling fans with easily replaceable filters
- ◆ 20 slots high capacity model
- ◆ Six 5.25" and one 3.5" drive bays

Specifications


◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x front-accessible 3.5" 6 x 5.25"
◆ Cooling Fans	4 x 8 cm
◆ I/O Openings	2 x COM, 3 x LPT, 1 x PS/2
◆ Expansion Slots	20 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset button
◆ Operating Temperature	0°C~50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White / B: Black
◆ Weight (Net/Gross)	15.4 kg / 20.4 kg
◆ Dimensions (DxWxH)	674 mm x 431 mm x 176 mm

Ordering Information

Part No.	Description
RACK-3200G □ / ACE-841AP-S	4U 20-slot rackmount chassis, with ACE-841AP-S-RS, RoHS

□ Color Code: B-Black W-White

Dimensions

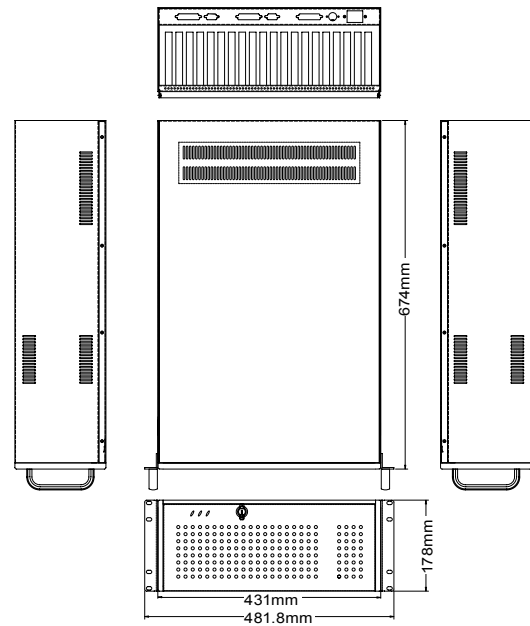

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
PCI-19S-RS-R40	PICMG1.0	4	14	0	0	0	AT/ATX
PX-20S2-RS-R40	PICMG1.0	17	3	0	0	0	AT/ATX
PX-20S3-RS-R40	PICMG1.0	18	1	0	0	0	AT/ATX
PXE-19S-R40 ¹	PICMG1.3	16	0	1	0	1	ATX

¹ Only R20 or later version can support PICMG 1.3 backplane

Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-935AL-RS	300W
	ACE-940AP-RS	390W
ATX	ACE-832AP-RS	300W
	ACE-841AP-S-RS	400W
	ACE-850AP-RS	500W
	ACE-4860AP-RS	600W
ATX redundant	ACE-R4130AP-RS	300W

RACK-3200G can support single PS/2 PSU. For more models of IEI PSU, please visit www.ieiworld.com

- 1 Application Server Platform
- 2 Single Board Computer
- 3 IBX Series POS PC
- 4 AFOLUX POS Panel PC
- 5 Video Capture Card
- 6 KAMIO RISC
- 7 IOVU Open HMI
- 8 VITO Universal Controller
- 9 DINO BLADE
- 10 LCD Product Series
- 11 Embedded System
- 12 Industrial Computer Chassis
- 13 Power Supply
- 14 Peripherals